

# WR-SP41-A/R2X

230 V / 50 Hz

## SELF-CONTAINED ICE CUBE MACHINE



### FEATURES CARACTERÍSTICAS

- ▶ **PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES**  
PRODUCE CUBITOS GOURMET MACIZOS Y CRISTALINOS
- ▶ **ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES**  
CONTROL ELECTRÓNICO QUE MEJORA EL FUNCIONAMIENTO DE LA MÁQUINA Y LE PERMITE ADAPTARSE A CLIMAS EXTREMOS
- ▶ **A3S: ANTI-SCALE SPRAY SYSTEM. THE ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES AVOIDS LIMESCALE DEPOSITS WITH SMALL VIBRATIONS**  
A3S: ANTI-SCALE SPRAY SYSTEM. EL SISTEMA DE SPRAY ELÁSTICO PATENTADO POR ITV EVITA LOS PEQUEÑOS DEPÓSITOS DE CAL MEDIANTE VIBRACIÓN
- ▶ **SMART FRONT VENTILATION SYSTEM (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT**  
EL SISTEMA INTELIGENTE DE VENTILACIÓN FRONTAL (SFVS) PERMITE LA INSTALACIÓN EMPOTRADA DE LA MÁQUINA
- ▶ **"NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. ITS DESIGN WITHOUT SEALS PREVENTS FROM DETERIORATION IN HARD WATER**  
BOMBA "NEVER STOP" DESARROLLADA POR ITV. SU DISEÑO SIN RETENES EVITA EL DETERIORO EN AGUAS DURAS
- ▶ **ON/OFF LIGHTED ROCKER SWITCH / NEW PCB MOUNTED AT THE BOTTOM.**  
INTERRUPTOR LUMINOSO DE FUNCIONAMIENTO ON-OFF/ NUEVA PLACA ELECTRÓNICA MONTADA EN LA PARTE INFERIOR
- ▶ **AISI 304 STAINLESS STEEL BODY**  
CARROCERÍA EN ACERO INOXIDABLE AISI 304
- ▶ **THE DISAPPEARING DOOR REDUCES THE FOOTPRINT OF THE MACHINE AND AVOIDS ACCIDENTS**  
LA PUERTA DESLIZANTE HACIA EL INTERIOR REDUCE LA SUPERFICIE OCUPADA Y EVITA ACCIDENTES
- ▶ **TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM A 155MM**  
MÁQUINAS TROPICALIZADAS (CLASE T) / PATAS DE ALTURA AJUSTABLE DE 105MM A 155MM
- ▶ **NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION**  
GAS NATURAL R290 CON MUY BAJO ÍNDICE GWP EL CUAL TAMBIÉN REDUCE EL CONSUMO ENERGÉTICO
- ▶ **AN ANTI-LIMESCALE FILTER IS ADVISED IN HARD WATER AREAS (WATER HARDNESS OVER 30 °fH)**  
SE RECOMIENDA USAR UN FILTRO ANTICAL EN CASO DE AGUAS DURAS (AGUA CON DUREZA SUPERIOR A 30°fH)



|           | <br>24 H<br>(Kg) | <br>10°C<br>(Kg) | <br>10°C<br>(Kg) | <br>21°C<br>(Kg) | <br>15°C<br>(Kg) | <br>(Kg) | <br>(mm) | <br>(mm) |
|-----------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| SS 45 M A |                  | 45                                                                                                  | 43                                                                                                  | 15                                                                                                  | Width 435<br>Depth 605<br>Height 701*                                                                | Width 500<br>Depth 650<br>Height 830                                                        | Width 500<br>Depth 650<br>Height 830                                                         | Width 500<br>Depth 650<br>Height 830                                                          |
| SS 45 M W |                  | 47                                                                                                  | 45                                                                                                  |                                                                                                     |                                                                                                      |                                                                                             |                                                                                              |                                                                                               |



SS M 22 Gr

35 (Ø) x 35 mm (H)

Average dimensions Dimensiones promedio

\* WITH LEGS 806/856 CON PATAS 806/856

### ACCESSORIES ACCESORIOS

#### INCLUDED



WATER INLET HOSE  
MANGUERA DE ENTRADA DE AGUA



WATER OUTLET HOSE  
MANGUERA DE DESAGÜE



4 HEIGHT ADJUSTABLE LEG  
4 PATAS ALTURA REGULABLE



WATER INLET FILTER GASKET  
JUNTA DE FILTRO DE ENTRADA DE AGUA



SMALL SCOOP  
PALA PEQUEÑA

#### NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER  
FILTRO ANTICAL



C4 WATER SOFTENER  
DESCALCIFICADOR C4



ANTI-LIMESCALE + ANTI-CHLORINE FILTER CS101  
FILTRO ANTICAL + ANTICLORO CS101



CALKLIN 50 CLEANER  
PRODUCTO ANTICAL



PARTICLE FILTER  
FILTRO ANTIPARTÍCULAS




ANTI-CHLORINE FILTER  
FILTRO ANTICLORO




SS 45 M


RIGHT SIDE VIEW  
VISTA LATERAL DERECHA




FRONTAL VIEW  
VISTA FRONTAL

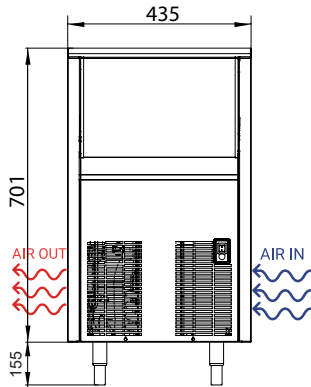

REAR VIEW  
VISTA TRASERA

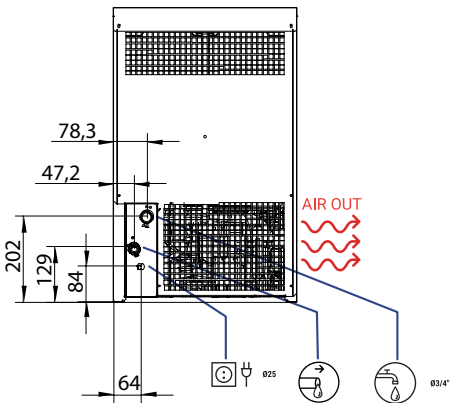

TOP VIEW  
VISTA SUPERIOR



\* All measurements in mm.  
\* Todas las cotas en mm.

OPERATING CONDITIONS CONDICIONES DE TRABAJO

PRODUCTION 50Hz PRODUCCIÓN 50 Hz

±10% V

5°C/43°C

5°C/35°C

1 bar/6 bar

24 Ice cubes/cycle



| V   | Hz | ph |
|-----|----|----|
| 230 | 50 | 1N |



SS 45 M AIR COOLED

| °C<br>°F    | 10°<br>50° | 15°<br>60° | 21°<br>70° | 30°<br>86° |
|-------------|------------|------------|------------|------------|
| 10°<br>50°  | 45         | 43         | 42         | 38         |
| 21°<br>68°  | 44         | 43         | 41         | 36         |
| 32°<br>90°  | 41         | 40         | 37         | 32         |
| 43°<br>109° | 33         | 30         | 27         | 23         |



SS 45 M WATER COOLED

| °C<br>°F    | 10°<br>50° | 15°<br>60° | 21°<br>70° | 30°<br>86° |
|-------------|------------|------------|------------|------------|
| 10°<br>50°  | 47         | 44         | 43         | 38         |
| 21°<br>68°  | 46         | 45         | 42         | 39         |
| 32°<br>90°  | 44         | 43         | 41         | 37         |
| 43°<br>109° | 40         | 38         | 37         | 35         |



MODELS  
MODELOS



SS 45 M A



1.266 4.322

424

3 1,5

10

17,7

6

953 3.253

44

46

0,28

SS 45 M W



1.266 4.322

374

3 1,5

10

15,6

26,2

953 3.253

44

46

0,28