




Ice Cube

Self-contained ice maker - Sprayer system Daily production up to 155 kg

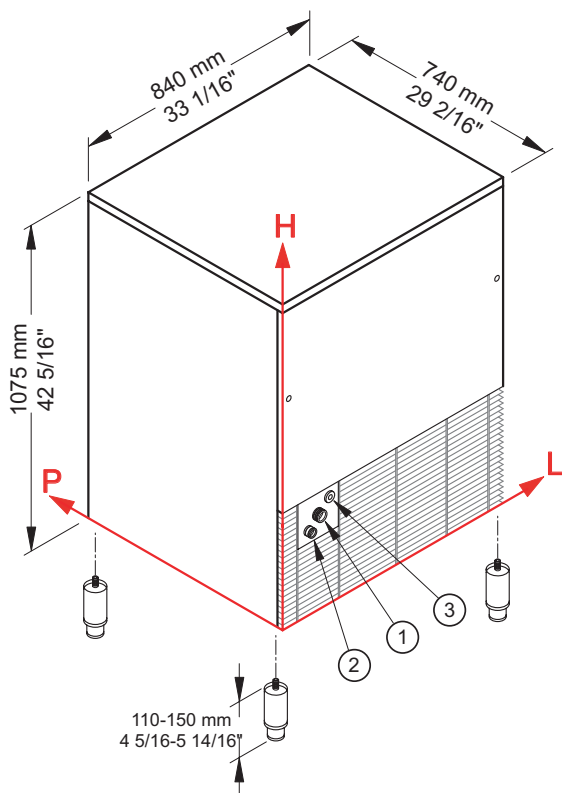

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	155 kg					
	50° F		342 lbs				
	21° C			154 kg			
	70° F				340 lbs		
	32° C					145 kg	
	90° F						320 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 141 mm / 5 9/16" - 290 mm / 11 7/16" - 3/4" ② Water out.: 79 mm / 3 2/16" - 245 mm / 9 10/16" - 24 mm / 15/16"
- ③ Electrical connections: 186 mm / 7 5/16" - 326 mm / 12 13/16"

► Technical information

Production in 24h 154 kg / 340 lbs

Store capacity, up to 65 kg / 143 lbs

Cooling system A

Kind of cube A-18g

Refrigerant R290

Standard voltage 220-240 V ~ 50 Hz

Average power consumption 1280 W

Fuse 16 A

Electrical consumption 19 kWh/100kg

Water consumption A: 2 l/kg - 24 gal/100 lbs

Sizes (L-P-H mm) 840 - 740 - 1075

(L-P-H in) 33 1/16 - 29 2/16 - 42 5/16

Sizes with pack (L-P-H mm) 880 - 785 - 1245

(L-P-H in) 34 10/16 - 30 14/16 - 49

Net weight 118 kg / 260 lbs

Gross weight 138 kg / 304 lbs

Finish AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (13 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice